
NEW


KMK
SKF locknut
with quick and safe locking

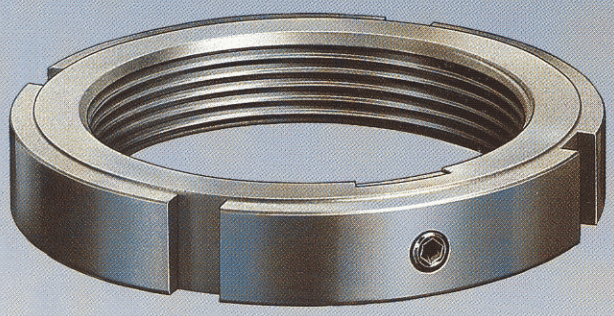


- *Easy mounting without lockwashers.*
- *No keyways needed.*
- *Safe, positive locking effect.*
- *No damage to shaft.*
- *Reuseable.*
- *Simple tools can be used.*

SKF

SKF increases their range of locknuts!

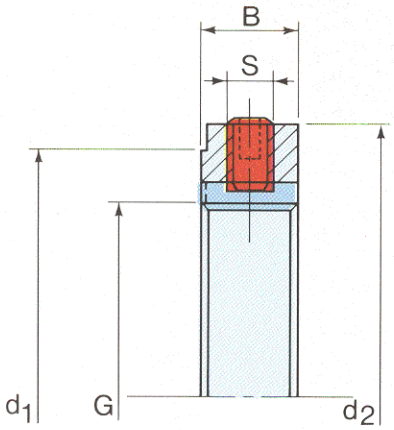

Nut

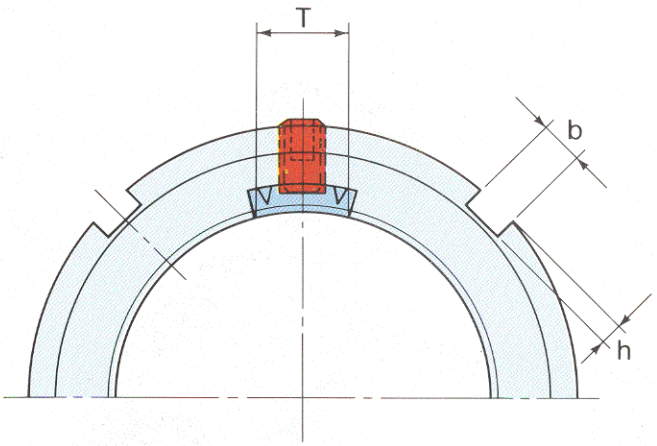

Size	Thread	Dimensions							Wt.	Tightening torque	Maximum axial load
	G	d_1	d_2	B	b	h	S	T		max	
		mm							kg	Nm	N
KMK 5	M 25 × 1.5	33	38	9	5	2	M 5	10	0.03	4	31.500
KMK 6	M 30 × 1.5	40	45	9	5	2	M 6	10	0.06	8	36.500
KMK 7	M 35 × 1.5	47	52	9	5	2	M 6	10	0.07	8	50.000
***KMK 8**	M 40 × 1.5	52	58	11	6	2.5	M 6	12	0.11	8	62.000
KMK 9	M 45 × 1.5	59	65	11	6	2.5	M 6	12	0.14	8	78.000
***KMK 10**	M 50 × 1.5	64	70	13	6	2.5	M 6	12	0.18	8	91.500
KMK 11	M 55 × 2	68	75	13	7	3	M 8	12	0.19	18	91.500
***KMK 12**	M 60 × 2	73	80	13	7	3	M 8	12	0.20	18	95.000
KMK 13	M 65 × 2	78	85	14	7	3	M 8	14	0.24	18	108.000
KMK 14	M 70 × 2	84	92	14	8	3.5	M 8	14	0.28	18	118.000
KMK 15	M 75 × 2	90	98	14	8	3.5	M 8	14	0.33	18	134.000
KMK 16	M 80 × 2	97	105	18	8	3.5	M 8	16	0.45	18	173.000
KMK 17	M 85 × 2	102	110	18	8	3.5	M 10	16	0.52	35	190.000
KMK 18	M 90 × 2	111	120	18	10	4	M 10	16	0.65	35	216.000
KMK 19	M 95 × 2	116	125	20	10	4	M 10	16	0.76	35	236.000
KMK 20	M 100 × 2	121	130	20	10	4	M 10	16	0.80	35	255.000

* Available from stock

SKF Engineering Products Ltd.
Charter House
426 Avebury Boulevard
Central Milton Keynes MK9 2HS
Tel: 0908 618666 Telex: 826869
Fax: 0908 672676

Publication No. 3939 E. 1000. 89-09

© Copyright SKF.